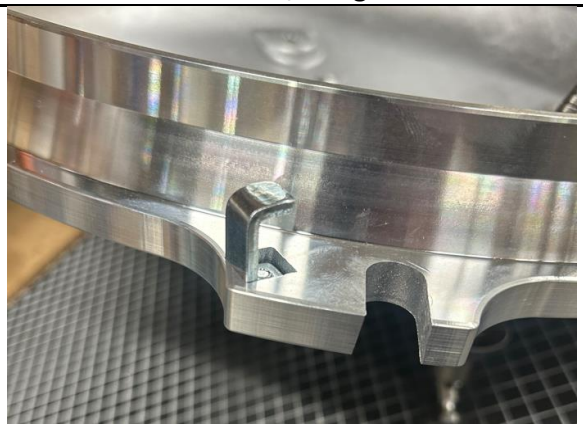
ALL AMERICAN 1930

Bayonet Clamp
Replacement Instructions

Part Name	Retaining Bayonet Clamp	Part Number	78/ 79

Instruction Details	Photos/ Images
Tools Needed: Screw Driver	
Removal Instructions 1. Using a screwdriver remove the bayonet clamp by turning screw counterclockwise.	
Installation Instructions 2. Assemble the new bayonet as shown into the square hole with the treads up.	
3. Assemble the screw into the hole and then tighten by turning in clockwise.	 