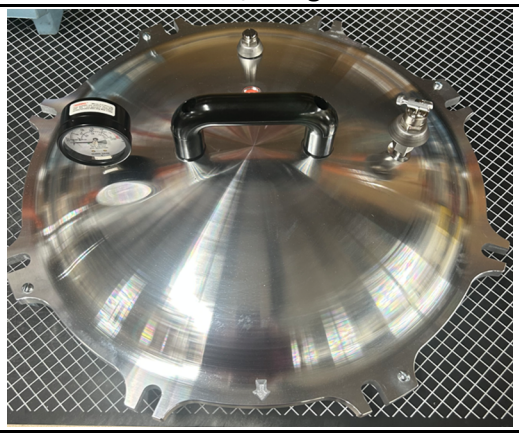
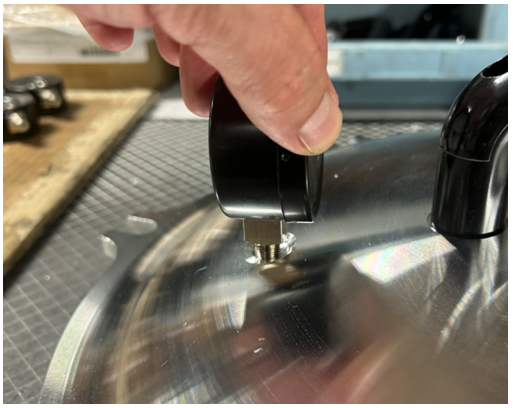
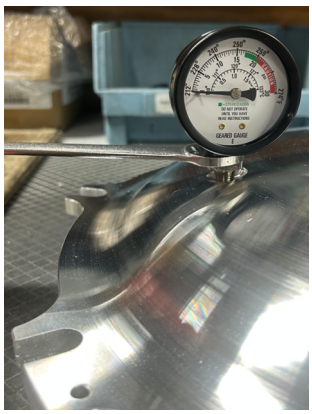
ALL AMERICAN 1930

Pressure Gauge
Replacement Instructions

Part Name	Pressure Gauge	Part Number	72S

Instruction Details	Photos/ Images
Tools Needed: 9/16" Combination Wrench Olive Oil Penetrating Oil	
Removal Instructions 1. Add a couple drops of penetrating oil at the base where threads enter into the cover and let soak in for about 10 minutes. Using a 9/16" combination wrench remove the gauge by turning it counter clockwise.	 
Installation Instructions 2. Apply a couple of drops of olive oil to the threads of the new gauge. Inspect the threads in the cover and make sure they are clean and free of debrris. Turn gauge in clockwise by hand until it stops.	 
3. Using the 9/16" combination wrench turn the gauge in an additional 1 to 1-1/2 turns until gauge is facing front towards the cast in arrow in the cover. Do not over tighten you could possibly damage the gauge. Clean thoroughly to remove oils used during the process.	 

Process Notice -
Internal Communication

Rev. Date	Rev	Description of Change	Approved by:	Approved Date: